

10G DWDM XFP 120km Optical Transceiver

NXD-xx192-12C

Features

Wavelength selectable to C-band ITU-T grid wavelengths

Suitable for use in 100GHz channel spacing DWDM systems

XFP MSA Rev 4.5 Compliant

Data rate from 9.95Gbps to 10.3Gbps

Reference Clock Options

Cooled EML and APD receiver

link length up to 120km (with amplifier)

2400ps/nm Dispersion Tolerance for 120km Single mode fiber

+1.8V,+3.3V,+5V Supply Voltage


Low Power Dissipation 3.5W Maximum

XFI and lineside loopback Mode Supported

-5°C to 70°C Operating Case Temperature

Diagnostic Performance Monitoring of module temperature,

Supply Voltages, laser bias current, transmit optical power, and receive optical power

RoHS6 compliant (lead free) 

Applications

10G Ethernet

Description

120km XFP Transceiver exhibits excellent wavelength stability, supporting operation at 100GHz channel, cost effective module. It is designed for 10G Ethernet applications. The transmitter section incorporates a cooled EML laser, and the receiver section consists of a APD photodiode integrated with a TIA, Integrated low power dual CDR with Electronic Dispersion Compensation (EDC). This module can be used to compensate channel impairments caused by either single mode fiber up to 120 km .All modules satisfy class I laser safety requirements. XFP transceiver provides an enhanced monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage.



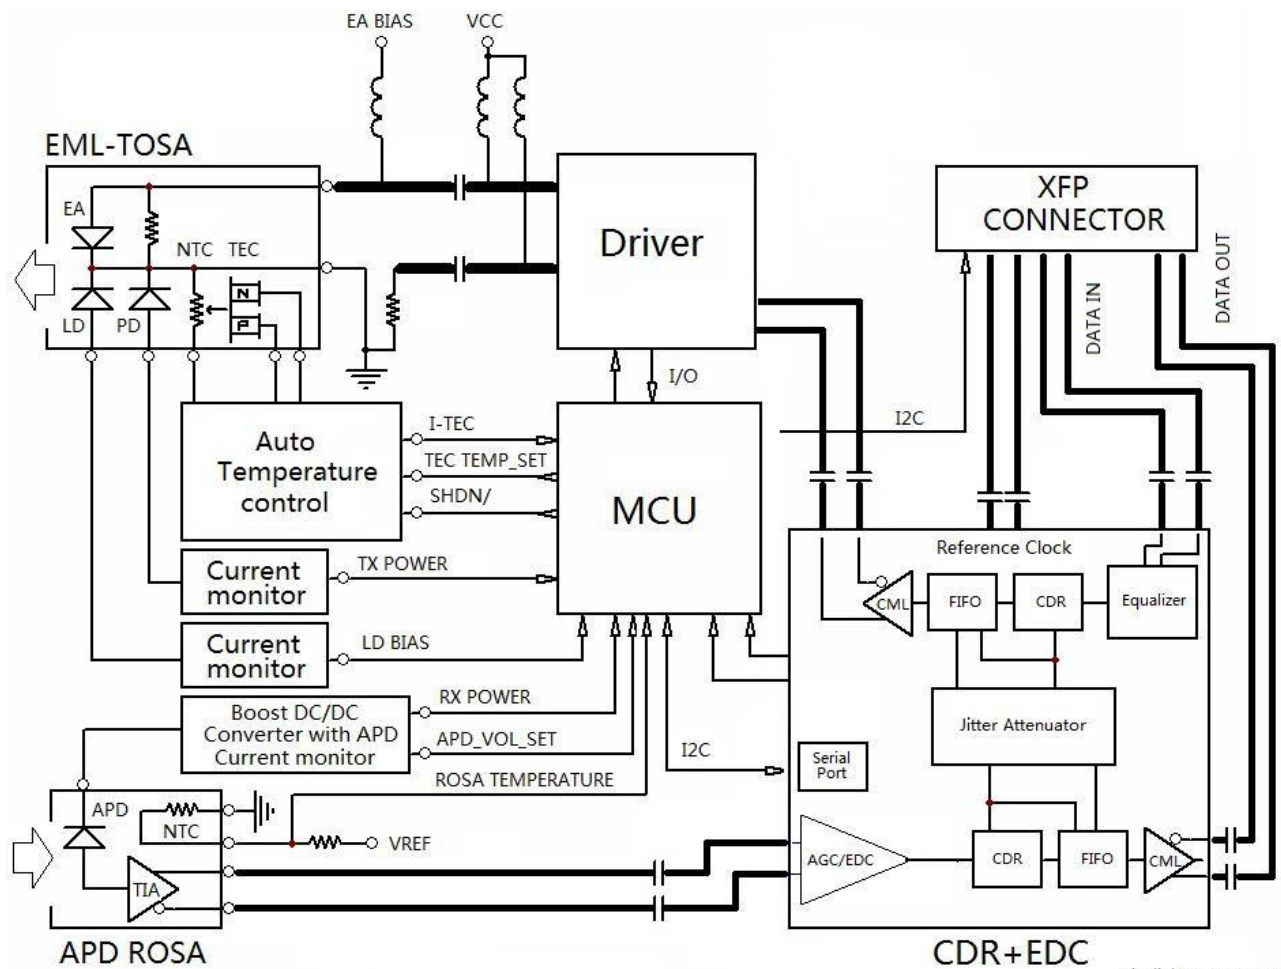


Figure1. Module Block Diagram

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage 1	Vcc3	-0.5	4.0	V
Supply Voltage 2	Vcc5	-0.5	6.0	V
Supply Voltage 3	Vcc2	-0.5	2	V
Storage Temperature	Tst	-40	85	°C
Case Operating Temperature	Top	-5	70	°C

Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Supply Voltage 1	Vcc3	3.13	3.3	3.47	V
Supply current 1	Icc3	-	-	750	mA
Supply Voltage 2	Vcc5	4.75	5	5.25	V
Supply current 2	Icc5	-	-	500	mA
Supply Voltage 3	Vcc2	1.71	1.8	1.89	V
Supply current 3	Icc2	-	-	750	mA
Operating Case temperature	Tca	-5	-	70	°C
Module Power Dissipation	Pm	-	-	3.5	W

Transmitter Specifications – Optical

Parameter	Symbol	Min	Typical	Max	Unit
Center Wavelength-Start of Life [1]	λ_c	$\lambda_c - 25$	λ_c	$\lambda_c + 25$	pm
Center Wavelength-End of life [1]	λ_c	$\lambda_c - 100$	λ_c	$\lambda_c + 100$	pm
Optical Transmit Power	Po	-2	-	+2	dBm
Optical Transmit Power (disabled)	PTX_DIS	-	-	-30	dBm
Extinction Ratio	ER	9	-	-	dB
Jitter Generation(P-P)	JG P-P	-	-	0.1	UI
Jitter Generation(RMS)	JG RMS	-	-	0.01	UI
Spectral Width (-20dB)	$\Delta\lambda_{20}$	-	-	0.3	nm
Side Mode Suppression Ratio	SMSR	30	-	-	dB
Relative Intensity Noise	RIN	-	-	-130	dB/Hz
Eye Mask	Compliant with ITU-T G.691 STM-64 eye mask				

Note:

Wavelength stability is achieved within 60 seconds (max) of power up.

BER=10⁻¹²; PRBS 2³¹-1@9.95Gbps

Transmitter Specifications – Electrical

Parameter	Symbol	Min	Typical	Max	Unit
Input differential impedance	Rim	-	100	-	Ω
Differential data Input	VtxDIFF	120	-	850	mV
Transmit Disable Voltage	VD	2.0	-	Vcc3+0.3	V
Transmit Enable Voltage	Ven	0	-	+0.8	V
Transmit Disable Assert Time	Vn	-	-	10	us

Receiver Specifications – Optical

Parameter	Symbol	Min	Typical	Max	Unit
Maximum Input Power	RX-overload	-7	-	-	dBm
Input Operating Wavelength	λ	1528	-	1565	nm
Reflectance	Rrx	-	-	-27	dB
Loss of Signal Asserted	LOS_A	-34	-	-	dBm
LOS De-Asserted	LOS_D	-	-	-24	dBm
LOS Hysteresis	LOS_H	0.5	-	-	dB
Receiver Sensitivity					
Data rate (Gb/s)	BER	Dispersion (ps/nm)	Sensitivity back-to-back at OSNR>30dB (dBm)	Power Penalty at OSNR>30dB (dB)	
9.95 ~10.7	1e-12	-500 to 2400	-24	3	
OSNR Performance					
Data rate (Gb/s)	BER	Dispersion (ps/nm)	Min OSNR Back-to-back at Power: -7 to -18dBm (dB)	Max OSNR Penalty at Power:-7 to -18dBm (dB)	
9.95 ~10.7	1e-12	-500 to 2400	24	4	

Note:

BER=10⁻¹²; PRBS 2³¹-1;

Receiver Specifications – Electrical

Parameter	Symbol	Min	Typical	Max	Unit
Output differential impedance	Rom	-	100	--	Ω
Differential Output Swing	Vout P-P	350	-	850	mV
Rise/Fall Time [1]	Tr / Tf	24	-	-	ps
Loss of Signal –Asserted	VOH	2	-	Vcc3+0.3-	V
Loss of Signal –Negated	VOL	GND	-	GND+0.5	V

Note:

20%-80%;

Reference Clock (Options)

Parameter	Symbol	Min	Typical	Max	Unit
Clock Differential Input Impedance	CI	80	100	120	Ω
Differential Input Amplitude (p-p)	DCA	640-	-	1600	mV
Reference Clock Duty Cycle	RCY	40	-	60	%
Reference Clock Rise/Fall Time [1]	Tr/Tf	200	-	1250	ps
Reference Clock Frequency	f_u	-	Baud/64	-	MHz

Note:

20%-80%;

C-band λ_c Wavelength Guide

ITU Channel	Product Code	Frequency(THz)	Wavelength	ITU Channel	Product Code	Frequency(THz)	Wavelength
17		191.7	1563.86	40		194.0	1545.32
18		191.8	1563.05	41		194.1	1544.53
19		191.9	1562.23	42		194.2	1543.73
20		192.0	1561.42	43		194.3	1542.94
21		192.1	1560.61	44		194.4	1542.14
22		192.2	1559.79	45		194.5	1541.35
23		192.3	1558.98	46		194.6	1540.56
24		192.4	1558.17	47		194.7	1539.77
25		192.5	1557.36	48		194.8	1538.98
26		192.6	1556.55	49		194.9	1538.19
27		192.7	1555.75	50		195.0	1537.40
28		192.8	1554.94	51		195.1	1536.61
29		192.9	1554.13	52		195.2	1535.82
30		193.0	1553.33	53		195.3	1535.04
31		193.1	1552.52	54		195.4	1534.25
32		193.2	1551.72	55		195.5	1533.47
33		193.3	1550.92	56		195.6	1532.68
34		193.4	1550.12	57		195.7	1531.90
35		193.5	1549.32	58		195.8	1531.12
36		193.6	1548.51	59		195.9	1530.33
37		193.7	1547.72	60		196.0	1529.55
38		193.8	1546.92	61		196.1	1528.77
39		193.9	1546.12				

Pin Descriptions

Pin	Logic	Symbol	Name/Description	Ref.
1		GND	Module Ground	1
2		VEE5	Optional –5.2 Power Supply – Not required	
3	LVTTTL-I	Mod-Desel	ect; When held low allows the module to , respond to 2-wire serial interface commands	
4	LVTTTL-O	Interrupt	Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	LVTTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6		VCC5	+5 Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTTL-I	SCL	Serial 2-wire interface clock	2
11	LVTTTL- I/O	SDA	Serial 2-wire interface data line	2
12	LVTTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	LVTTTL-O	Mod_NR	Module Not Ready;	2
14	LVTTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply	
21	LVTTTL-I	Down/RS T	wer Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board	3
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

Notes:

Module circuit ground is isolated from module chassis ground within the module.

Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.

Reference Clock input is Options: When the host board provides Reference clock, Baudrate=RefClock x 64.

But when the host board does not provide Reference clock, A Crystal Oscillator must be installed inside the module, Crystal Oscillator frequency is exactly 1/64 of the Baudrate, and you must specify your host board Baudrate, after leaving the factory, Crystal Oscillator frequency will not be changed. Further details are available from any GIGALIGHT sales representative.

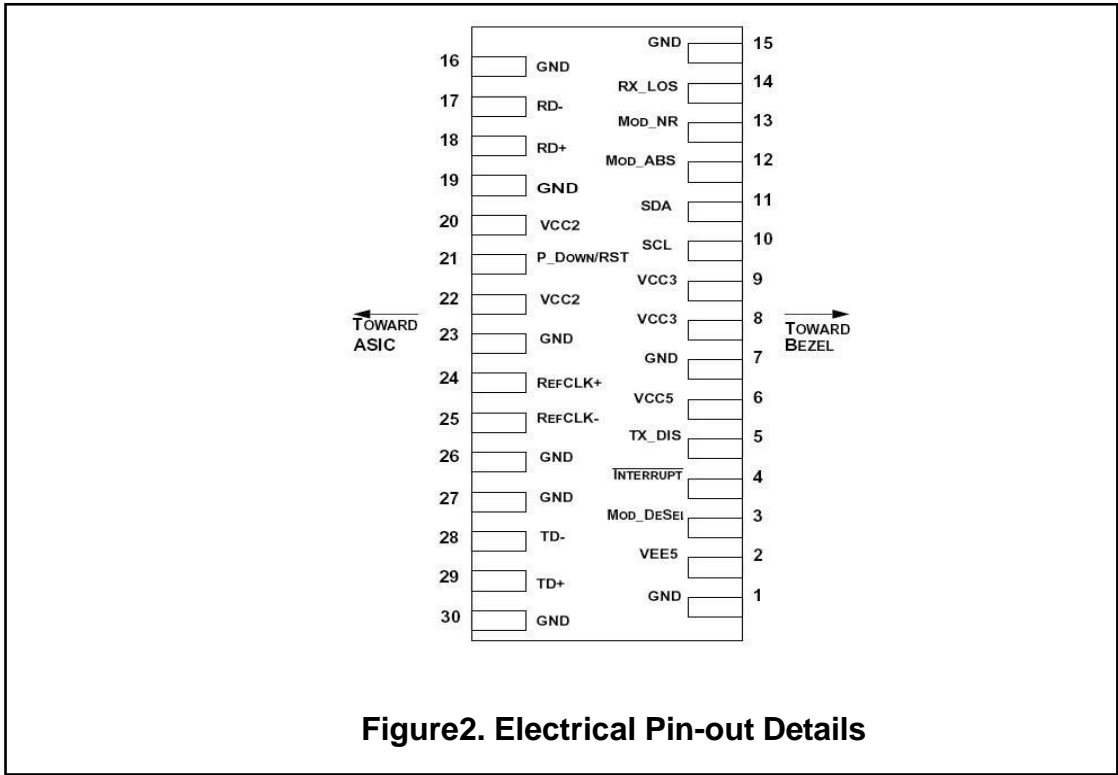


Figure2. Electrical Pin-out Details

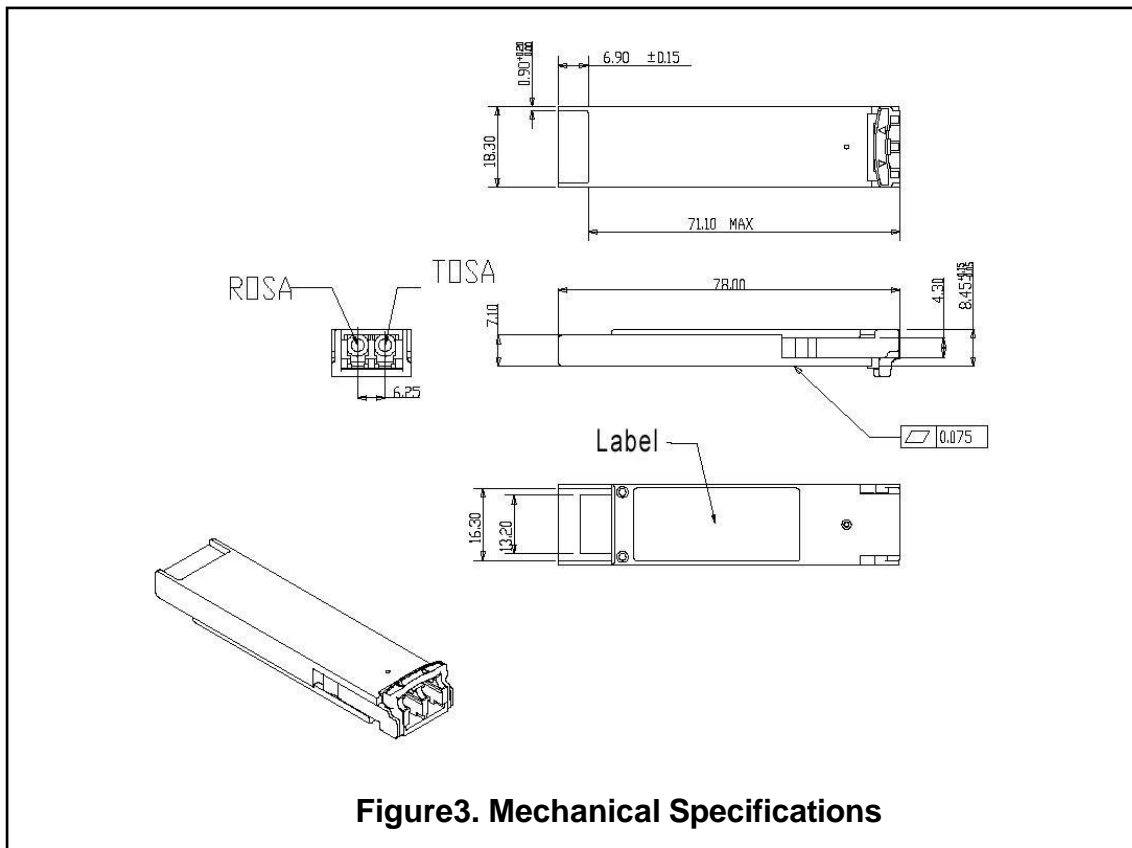


Figure3. Mechanical Specifications

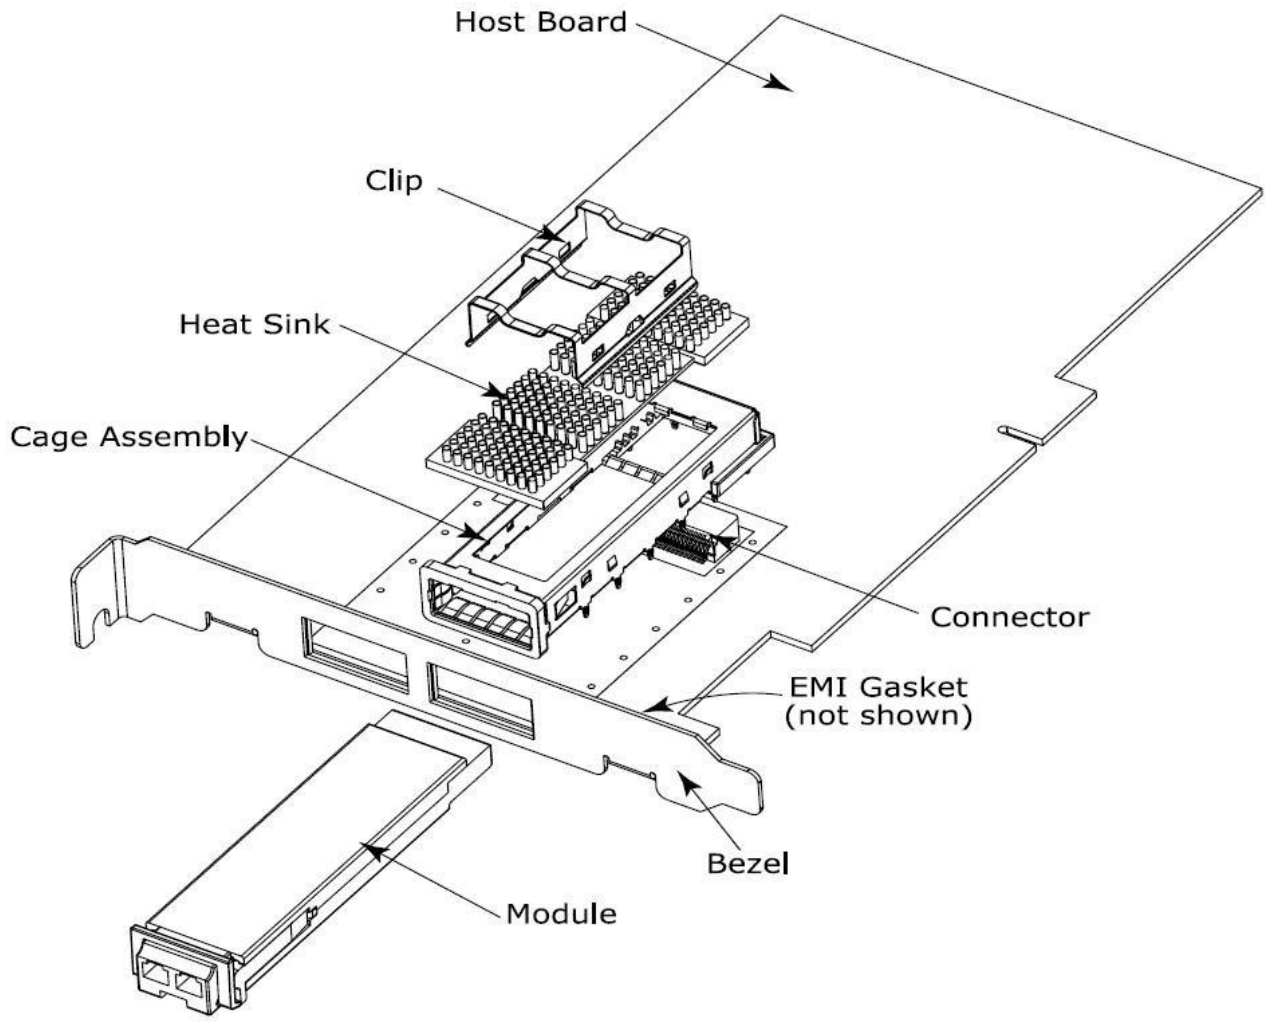


Figure4. XFP Mechanical Components

The mechanical components defined:

The module, clip and connector dimensions are constant for all applications. While the bezel, cage assembly, EMI gasket and heat sink can be designed and/or adjusted for the individual application.

The relatively small form factor of the XFP module combined with an adaptable heatsink option allows host system design optimization of module location, heatsink shape/dimension/fins design, and airflow control.

The module can be inserted and removed from the cage with the heat sink and clip attached.


Regulatory Compliance

XFP transceiver is designed to be Class I Laser safety compliant and is certified per the following standards:

Feature	Agency	Standard	Certificate / Comments
Laser Safety	FDA	CDRH 21 CFR 1040 and Laser Notice No.50	1120288-000
Product Safety	UL	UL and CUL EN60950-2:2007	E347511
Environmental protection	SGS	RoHS Directive 2002/95/EC	GZ1001008706/CHEM
EMC	WALTEK	EN 55022:2006+A1:2007 EN 55024:1998+A1+A2:2003 -	WT10093768-D-E-E

Ordering information

Part Number	Product Description
NXD-xx192-12C-1	XX= ITU Grid 21~60, 10Gbps, DWDM XFP 120km, -5°C ~ +70°C without built-in reference clock, support multi-data rate, which can be available for both SONET/SDH and 10G Ethernet if the host device provides reference clock
NXD-xx192-12C-2	XX= ITU Grid 21~60, 10Gbps, DWDM XFP 120km, -5°C ~ +70°C with fixed built-in reference clock for SONET/SDH only, if the host device doesn't provide reference clock
NXD-xx192-12C-3	XX= ITU Grid 21~60, 10Gbps, XFP 1550nm, 120km with EDFA, -5°C ~ +70°C with fixed built-in reference clock for 10G Ethernet only, if the host device doesn't provide reference clock

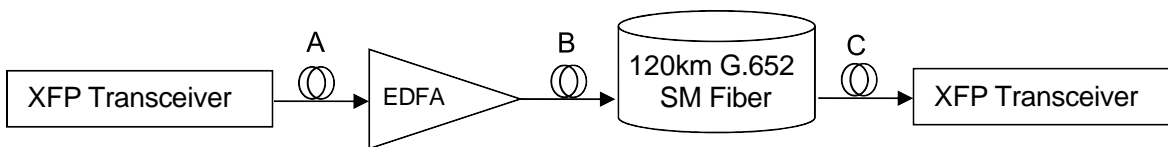

Application note

A: module output power: 0 ~ +4dBm

B: EDFA: Pout t ≤ +11dBm

C: Output after link ≤ 2400ps/nm, Pout ≥ -21dBm

References

10 Gigabit Small Form Factor Pluggable Module (XFP) Multi-Source Agreement (MSA), Rev 4.5 – August

2005. 2. IEEE802.3ae – 2002

ITU-T G.709 / ITU-T G.959.1

Telcordia GR-253-CORE