


Optical WDM Data Sheet

NCWDM-TV1550-GPON-XGS-PON

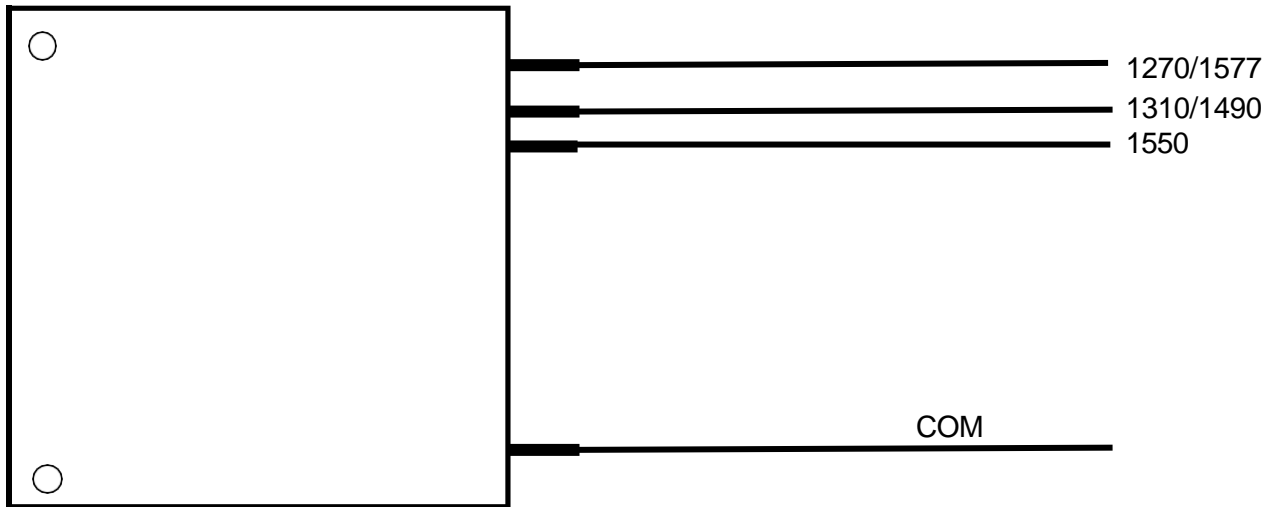

PERFORMANCE SPECIFICATIONS:

Parameter	1550	1310/1490	1270/1577
Mux Insertion Loss (dB)	0,55	0,72 / 0,77	1,09 / 1,14
Channel Ripple (dB)	<0.5		
Polarization Dependent Loss (dB)	<0.10		
PMD (ps)	<0.10		
Isolation	Adjacent (dB)	>25	
	Non-adjacent (dB)	>30	
Directivity (dB)	>50		
Return Loss (dB)	>55		
Connector	SC/APC		
Operating Temperature(°C)	- 20~+70 °C		
Storage Temperature (°C)	- 40~+85 °C		
Package Dimension (mm)	215*200*20		