


# Optical WDM Data Sheet

## NCWDM-2-TV1550-GPON-XGS-PON

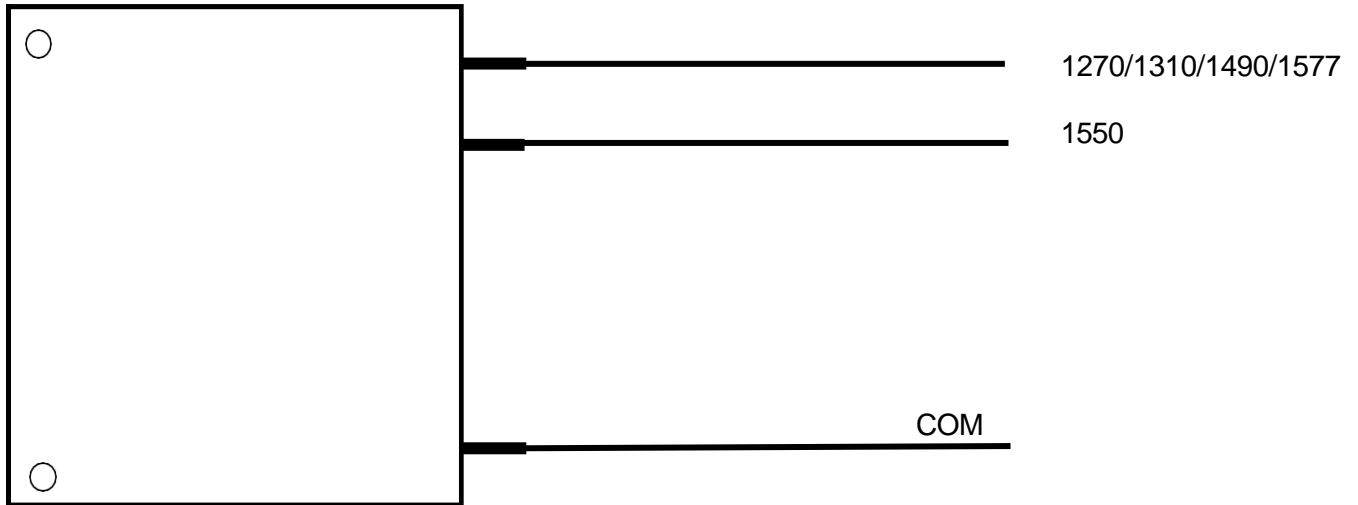

### PERFORMANCE SPECIFICATIONS:

Parameter	1550	1310/1490/1270/1577
Mux Insertion Loss (dB)	1,2	1,2 / 1,2 / 1,2 / 1,2
Channel Ripple (dB)	<0.5	
Polarization Dependent Loss (dB)	<0.10	
PMD (ps)	<0.10	
Isolation	Adjacent (dB)	>25
	Non-adjacent (dB)	>30
Directivity (dB)	>50	
Return Loss (dB)	>55	
Connector	SC/APC	
Operating Temperature(°C)	- 20~+70°C	
Storage Temperature (°C)	- 40~+85°C	
Package Dimension (mm)	215*200*20	